

Wide Input Voltage Range 10mA Ultra-Low Iq High PSRR Linear Regulator

Description

The AS2785 is a high-performance linear regulator, offering a very wide operating input voltage range of up to 450V DC, with an output current of up to 10mA.

Ideal for high input voltage applications such as industrial and home metering, home appliances. The AS2785 family offers $\pm 5\%$ initial accuracy, extremely high-power supply rejection ratio and ultra-low quiescent current. The AS2785 is optimized for high-voltage line and load transients, making this part ideal for harsh environment applications.

The AS2785 is offered in fixed output voltage options 2.7V, 3.3V, and 5.0V. ESOP8 and SOT89 package offers good thermal performance and help to minimize the solution size.


Features

- Wide Input Voltage Range:
DC: Up to 450V
AC: 50V to 260V (half-wave rectifier and 2.2 μ F capacitor)
- 10mA Guaranteed Output Current
- Ultra Low Quiescent Current: Typ. 10 μ A ($V_{OUT} \leq 5V$)
- $\pm 5\%$ Accuracy Over Full Load, Line and Temperature Variations
- Ultra-high PSRR: 70dB at 60Hz, 90dB at 100kHz
- Stable with Ceramic Output Capacitor 22 μ F MLCC
- Thermal Shutdown and Current Limit Protection
- Available in Thermally Enhanced ESOP8 and SOT89 Package
- This is a Pb-Free Device



Applications

- Industrial Applications, Home Appliances
- Home Metering / Network Application
- Off-line Power Supplies

Typical Application Circuit

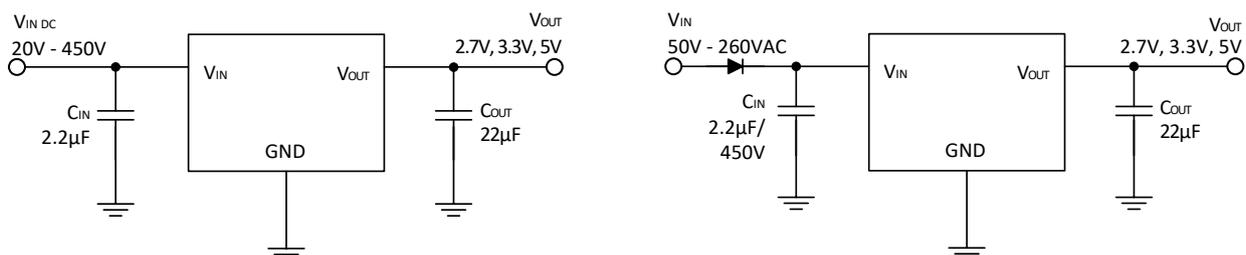

Pin Configuration

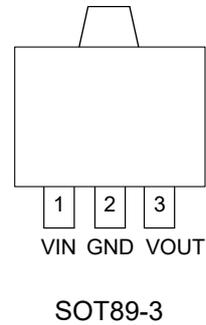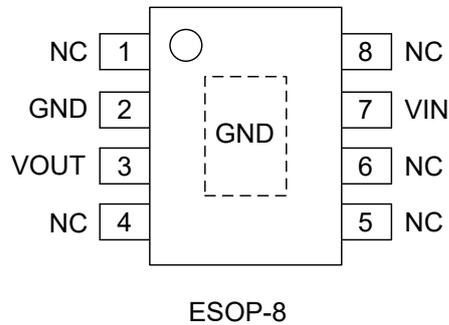

Pin Functions

Pin No.		Pin Name	Description
ESOP-8	SOT89-3		
1/4/5/6/8		NC	Not Connect.
2	2, Tab	GND	Ground connection.
3	3	VOUT	Regulator Output. Connect 22 μ F or larger MLCC capacitor from VOUT to GND.
7	1	VIN	Supply Voltage Input. Connect 2.2 μ F capacitor from VIN to GND.

Ordering Information

PART No.	PACKAGE	Tape&Reel
AS2785-2.7V	ESOP-8	4000pcs/reel
AS2785-3.3V	ESOP-8	4000pcs/reel
AS2785-5.0V	ESOP-8	4000pcs/reel
AS2785-2.7V	SOT89-3	3000pcs/reel
AS2785-3.3V	SOT89-3	3000pcs/reel
AS2785-5.0V	SOT89-3	3000pcs/reel


Absolute Maximum Ratings

Rating	Symbol	Value	Unit
Input Voltage	VIN	-0.3 to 650	V
Output Voltage	VOUT	-0.3 to 8	V
Maximum Junction Temperature	TJ(MAX)	150	°C
Storage Temperature	TSTG	-55 to 150	°C
ESD Capability, Human Body Model (All pins except HV pin no.1)	ESDHBM	2000	V
ESD Capability, Machine Model	ESDMM	200	V

THERMAL CHARACTERISTICS

Rating	Symbol	Value	Unit
Thermal Resistance, Junction-to-Air	ReJA	40	°C/W

Functional Block Diagram

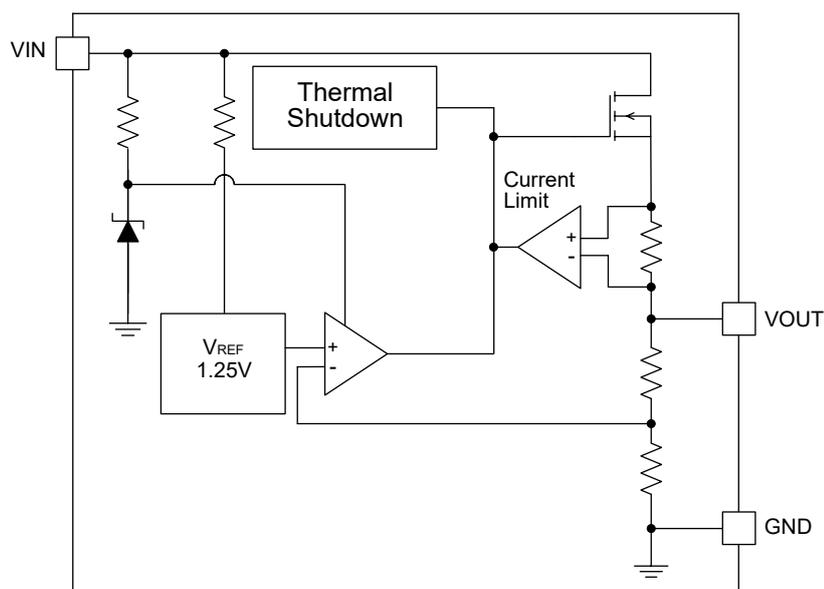

Electrical Characteristics, VOUT = 2.7V

($-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$; $V_{IN} = 340\text{ V}$; $I_{OUT} = 100\mu\text{A}$, $C_{IN} = 2.2\mu\text{F}$, $C_{OUT} = 22\mu\text{F}$, unless otherwise noted. Typical values are at $T_J = +25^{\circ}\text{C}$.)

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
Operating Input Voltage DC		V _{IN}	50		450	V
Output Voltage Accuracy	$T_J = 25^{\circ}\text{C}$, $I_{OUT} = 100\mu\text{A}$, $50\text{ V} \leq V_{IN} \leq 450\text{ V}$	V _{OUT}	2.5785	2.7	2.8215	V
	$-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$, $I_{OUT} = 100\mu\text{A}$, $50\text{ V} \leq V_{IN} \leq 450\text{ V}$	V _{OUT}	2.565	2.7	2.835	V
Line Regulation	$50\text{ V} \leq V_{IN} \leq 450\text{ V}$, $I_{OUT} = 100\mu\text{A}$	Reg _{LINE}	-0.5	0.1	+0.5	%/V
Load Regulation	$100\mu\text{A} \leq I_{OUT} \leq 10\text{ mA}$, $V_{IN} = 50\text{ V}$	Reg _{LOAD}	-1.0	0.66	+1.0	%
Maximum Output Current	$50\text{ V} \leq V_{IN} \leq 450\text{ V}$	I _{OUT}	10.5			mA
Quiescent Current	$I_{OUT} = 0$, $50\text{ V} \leq V_{IN} \leq 450\text{ V}$	I _Q		16	25	μA
Ground Current	$50\text{ V} \leq V_{IN} \leq 450\text{ V}$ $0 < I_{OUT} \leq 10\text{ mA}$	I _{GND}			28	μA
Power Supply Rejection Ratio	$V_{IN} = 340\text{ VDC} + 1\text{ Vpp}$ modulation, $I_{OUT} = 100\mu\text{A}$ $f = 1\text{ kHz}$	PSRR		70		dB
Noise	$f = 100\text{ Hz to } 100\text{ kHz}$ $V_{IN} = 340\text{ VDC}$, $I_{OUT} = 100\mu\text{A}$	V _{NOISE}		420		μVrms
Thermal Shutdown Temperature	Temperature increasing from $T_J = +25^{\circ}\text{C}$	TSD		145		$^{\circ}\text{C}$
Thermal Shutdown Hysteresis	Temperature falling from TSD	TSDH	-	10	-	$^{\circ}\text{C}$

Electrical Characteristics, VOUT = 3.3V

($-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$; $V_{IN} = 340\text{V}$; $I_{OUT} = 100\mu\text{A}$, $C_{IN} = 2.2\mu\text{F}$, $C_{OUT} = 22\mu\text{F}$, unless otherwise noted. Typical values are at $T_J = +25^{\circ}\text{C}$.)

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
Operating Input Voltage DC		V_{IN}	50		450	V
Output Voltage Accuracy	$T_J = 25^{\circ}\text{C}$, $I_{OUT} = 100\mu\text{A}$, $50\text{V} \leq V_{IN} \leq 450\text{V}$	V_{OUT}	3.1515	3.3	3.4485	V
	$-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$, $I_{OUT} = 100\mu\text{A}$, $50\text{V} \leq V_{IN} \leq 450\text{V}$	V_{OUT}	3.135	3.3	3.465	V
Line Regulation	$50\text{V} \leq V_{IN} \leq 450\text{V}$, $I_{OUT} = 100\mu\text{A}$	RegLINE	-0.5	0.2	+0.5	%
Load Regulation	$100\mu\text{A} \leq I_{OUT} \leq 10\text{mA}$, $V_{IN} = 50\text{V}$	RegLOAD	-1.0	0.6	+1.0	%
Maximum Output Current	$50\text{V} \leq V_{IN} \leq 450\text{V}$	I_{OUT}	10.5			mA
Quiescent Current	$I_{OUT} = 0$, $50\text{V} \leq V_{IN} \leq 450\text{V}$	I_Q		16	25	μA
Ground Current	$50\text{V} \leq V_{IN} \leq 450\text{V}$ $0 < I_{OUT} \leq 10\text{mA}$	I_{GND}			28	μA
Power Supply Rejection Ratio	$V_{IN} = 340\text{VDC} + 1\text{Vpp}$ modulation, $I_{OUT} = 100\mu\text{A}$ $f = 1\text{kHz}$	PSRR		70		dB
Noise	$f = 100\text{Hz}$ to 100kHz $V_{IN} = 340\text{VDC}$, $I_{OUT} = 100\mu\text{A}$	V_{NOISE}		240		μVrms
Thermal Shutdown Temperature	Temperature increasing from $T_J = +25^{\circ}\text{C}$	TSD		145		$^{\circ}\text{C}$
Thermal Shutdown Hysteresis	Temperature falling from TSD	TSDH	-	10	-	$^{\circ}\text{C}$


Electrical Characteristics, VOUT = 5.0V

($-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$; $V_{IN} = 340\text{ V}$; $I_{OUT} = 100\mu\text{A}$, $C_{IN} = 2.2\mu\text{F}$, $C_{OUT} = 22\mu\text{F}$, unless otherwise noted. Typical values are at $T_J = +25^{\circ}\text{C}$.)

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
Operating Input Voltage DC		V_{IN}	50		450	V
Output Voltage	$T_J = 25^{\circ}\text{C}$, $I_{OUT} = 100\mu\text{A}$, $50\text{ V} \leq V_{IN} \leq 450\text{ V}$	V_{OUT}	4.775	5.0	5.225	V
Accuracy	450 V					
	$-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$, $I_{OUT} = 100\mu\text{A}$, $50\text{ V} \leq V_{IN} \leq 450\text{ V}$	V_{OUT}	4.75	5.0	5.25	V
Line Regulation	$50\text{ V} \leq V_{IN} \leq 450\text{ V}$, $I_{OUT} = 100\mu\text{A}$	RegLINE	-0.5	0.2	+0.5	%
Load Regulation	$100\mu\text{A} \leq I_{OUT} \leq 10\text{ mA}$, $V_{IN} = 50\text{ V}$	RegLOAD	-1.0	0.62	+1.0	%
Maximum Output Current	$50\text{ V} \leq V_{IN} \leq 450\text{ V}$	I_{OUT}	10.5			mA
Quiescent Current	$I_{OUT} = 0$, $50\text{ V} \leq V_{IN} \leq 450\text{ V}$	I_Q		16	25	μA
Ground Current	$50\text{ V} \leq V_{IN} \leq 450\text{ V}$ $0 < I_{OUT} \leq 10\text{ mA}$	I_{GND}			28	μA
Power Supply Rejection Ratio	$V_{IN} = 340\text{ VDC} + 1\text{ Vpp}$ modulation, $I_{OUT} = 100\mu\text{A}$ $f = 1\text{ kHz}$	PSRR		70		dB
Noise	$f = 100\text{ Hz to } 100\text{ kHz}$ $V_{IN} = 340\text{ VDC}$, $I_{OUT} = 100\mu\text{A}$	V_{NOISE}		300		μVrms
Thermal Shutdown Temperature	Temperature increasing from $T_J = +25^{\circ}\text{C}$	T_{SD}		145		$^{\circ}\text{C}$
Thermal Shutdown Hysteresis	Temperature falling from T_{SD}	T_{SDH}	-	10	-	$^{\circ}\text{C}$

Application Information

The typical application circuit for the AS2785 device is shown below.

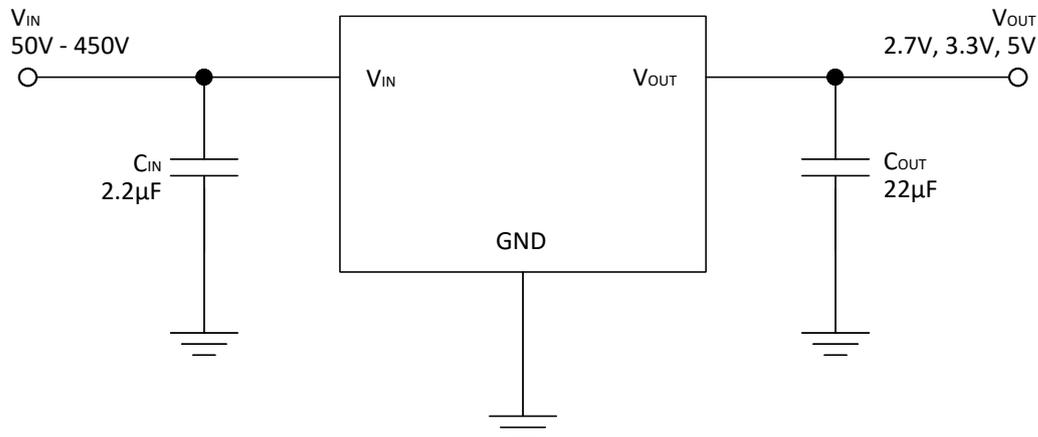

Typical Application Schematic

Input Decoupling(C1)

A $1\mu F$ capacitor either ceramic or electrolytic is recommended and should be connected close to the input pin of AS2785. Higher value $2.2\mu F$ is necessary to sustain the required minimum input voltage at full load for AC voltage as low as 85V with half wave rectifier.

Output Decoupling(C2)

The AS2785 Regulator does not require any specific Equivalent Series Resistance (ESR). Thus capacitors exhibiting ESRs ranging from a few $m\Omega$ up to 0.5Ω can be used safely. The minimum decoupling value is $22\mu F$. The regulator accepts ceramic chip capacitors as well as tantalum devices or low ESR electrolytic capacitors. Larger values improve noise rejection and load transient response.

Layout Recommendations


Please be sure the V_{IN} and GND lines are sufficiently wide. When the impedance of these lines is high, there is a chance to pick up noise or to cause the malfunction of regulator. Set external components, especially the output capacitor, as close as possible to the circuit, and make leads as short as possible.

Thermal

As power across the AS2785 increases, it might become necessary to provide some thermal relief. The maximum power dissipation supported by the device is dependent upon board design layout and used package. Mounting pad configuration on the PCB, the board material, and also the ambient temperature affect the rate of temperature rise for the part. This is stating that when the AS2785 has good thermal conductivity through the PCB, the junction temperature will be relatively low with high power dissipation applications.


Package Description

ESOP-8

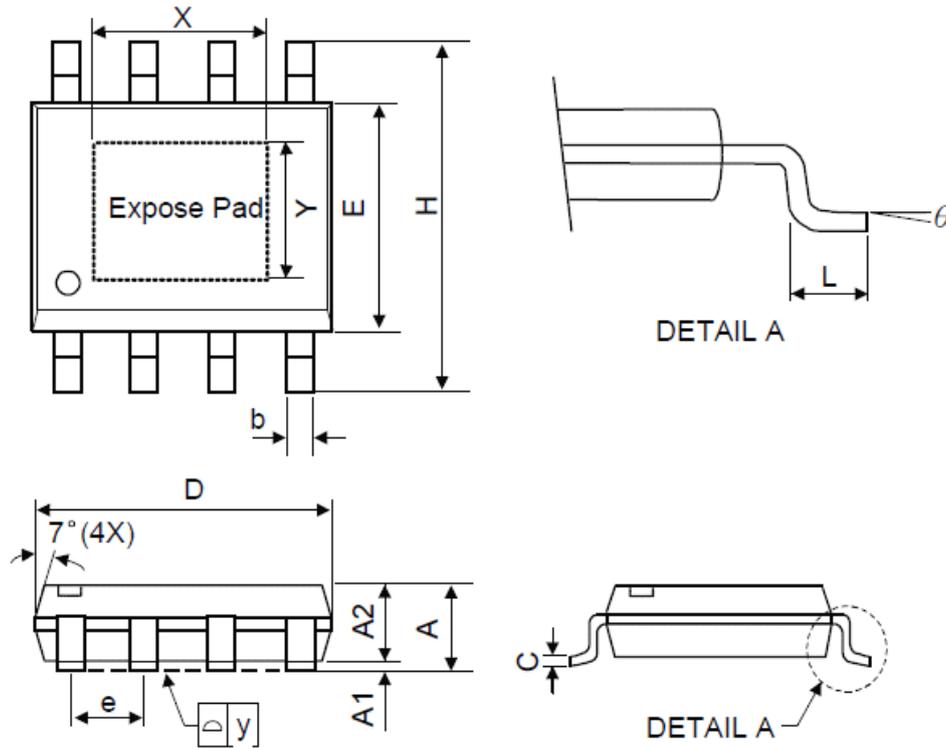

Symbol	Dimensions in Millimeters			Dimensions in Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	-	-	1.75	-	-	0.069
A1	0	-	0.15	0	-	0.06
A2	1.25	-	-	0.049	-	-
C	0.1	0.2	0.25	0.0075	0.008	0.01
D	4.7	4.9	5.1	0.185	0.193	0.2
E	3.7	3.9	4.1	0.146	0.154	0.161
H	5.8	6	6.2	0.228	0.236	0.244
L	0.4	-	1.27	0.015	-	0.05
b	0.31	0.41	0.51	0.012	0.016	0.02
e	1.27 BSC			0.050 BSC		
y	-	-	0.1	-	-	0.004
X	-	2.34	-	-	0.092	-
Y	-	2.34	-	-	0.092	-
θ	0°	-	8°	0°	-	8°

SOT89-3

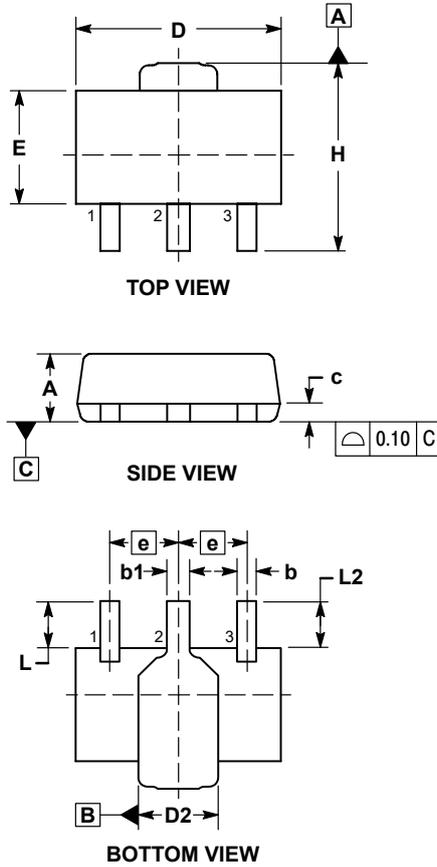

DIM	MILLIMETERS	
	MIN	MAX
A	1.40	1.60
b	0.38	0.47
b1	0.46	0.55
c	0.40	0.44
D	4.40	4.60
D2	1.60	1.90
E	2.40	2.60
e	1.50 BSC	
H	4.05	4.25
L	0.89	1.20